


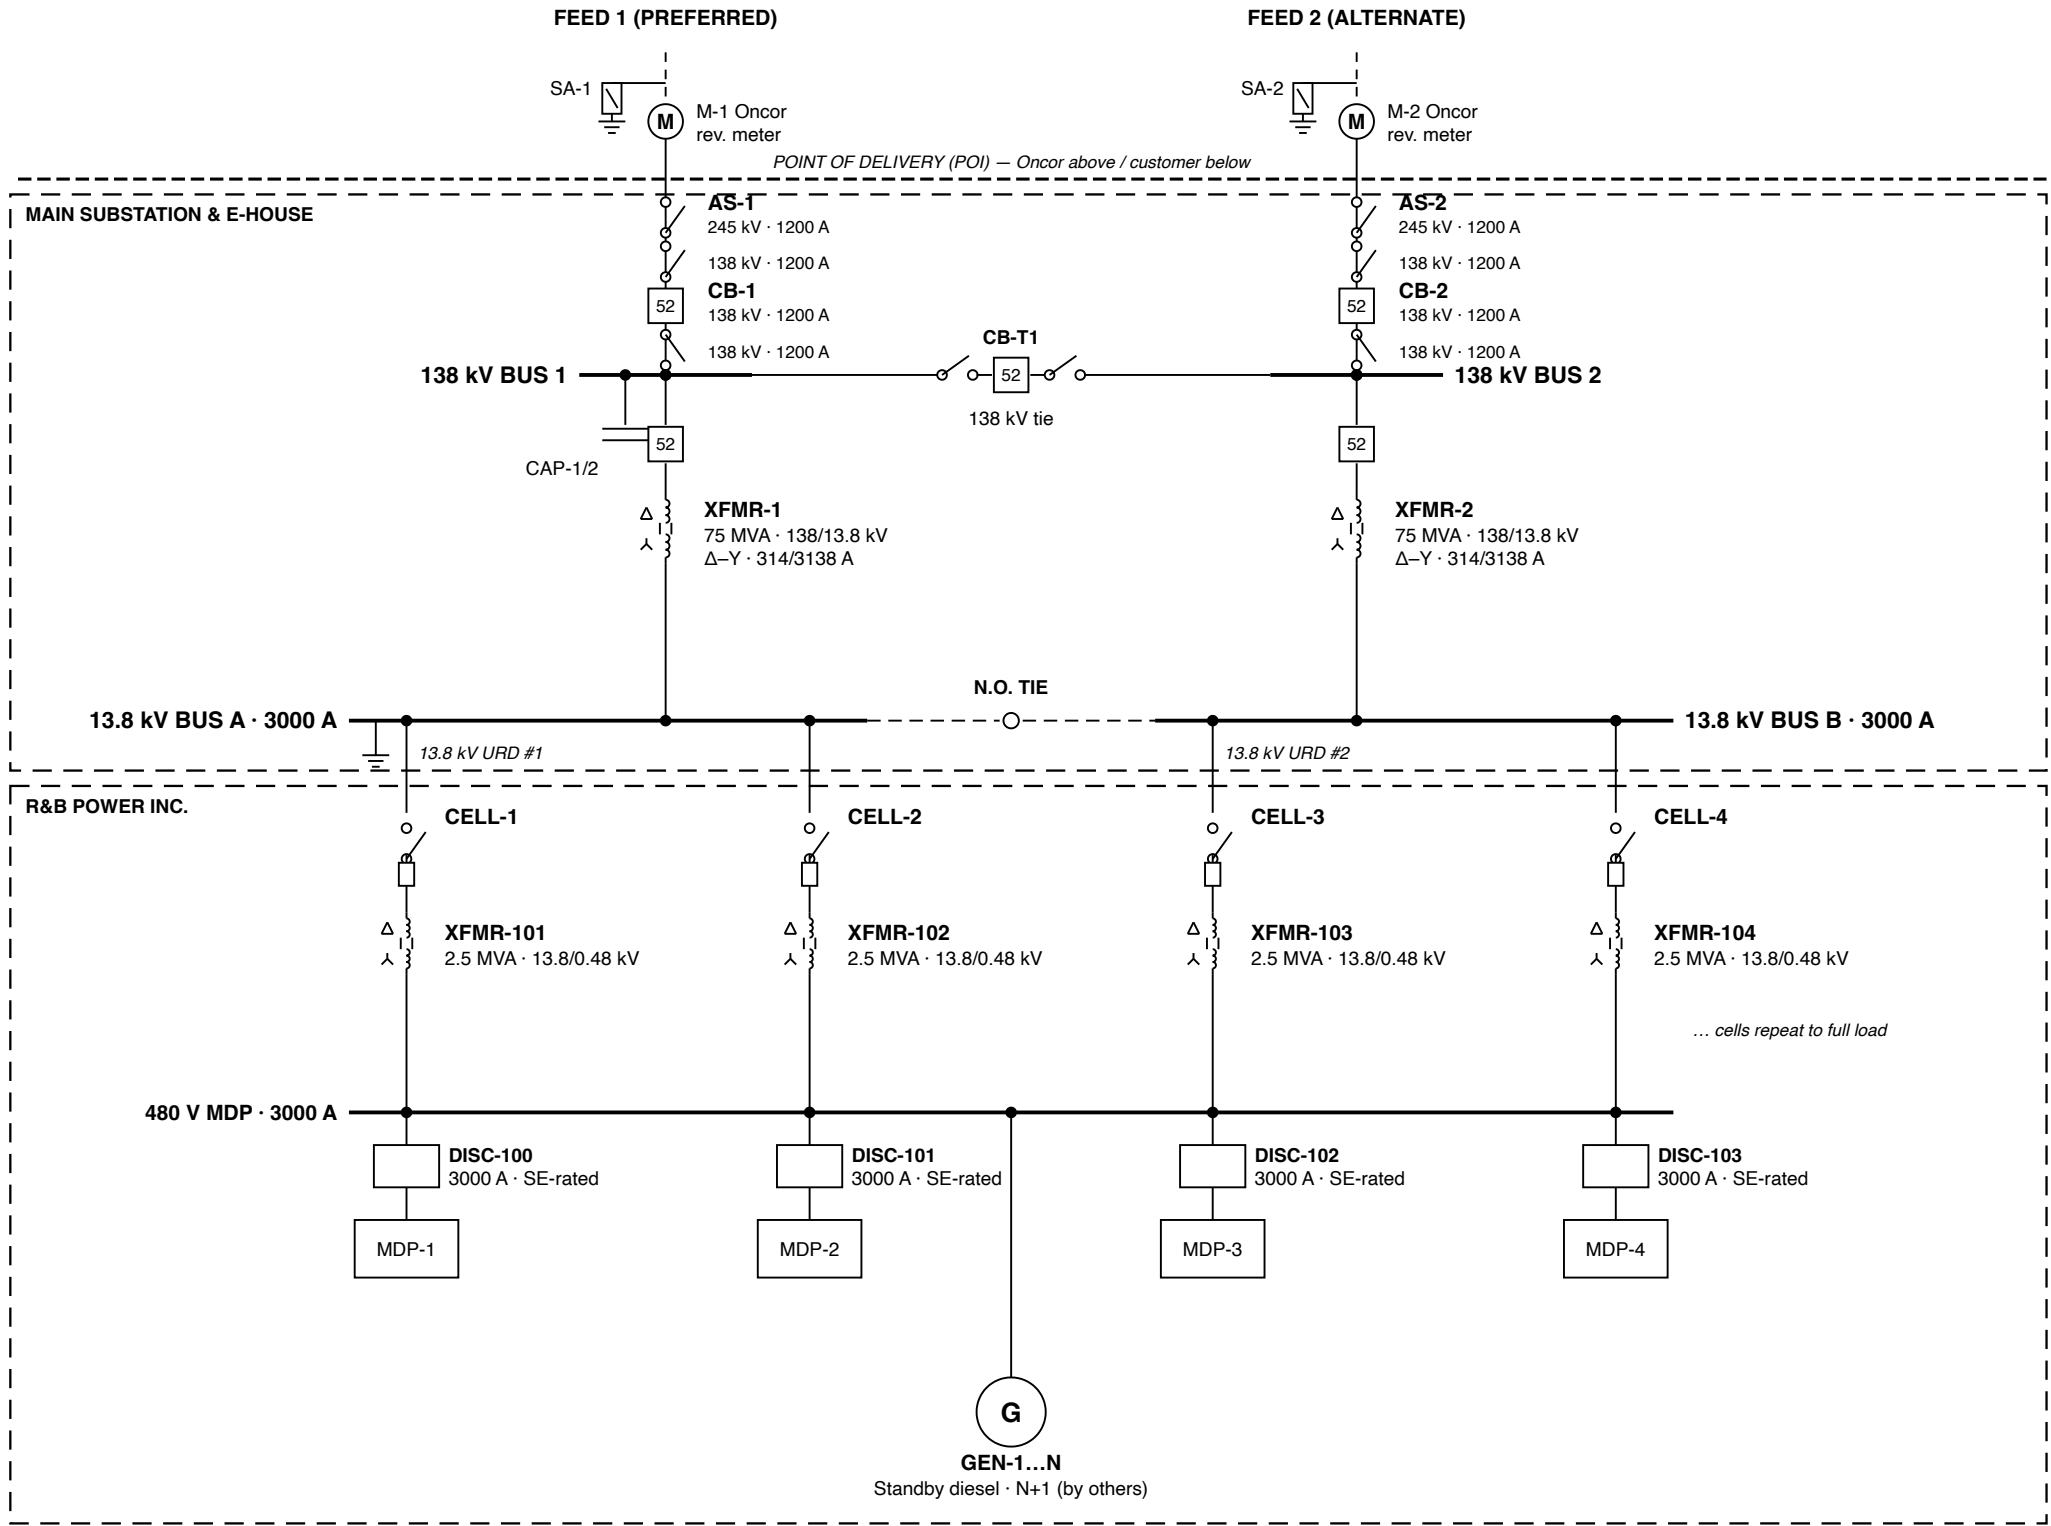

### GENERAL NOTES

- Service: dual (two-way) 138 kV feed; Oncor revenue metering (xfmr-rated) & arresters above POI.
- Ultimate 70 MW (~72 MVA @ 0.97 pf), data center.
- 2 × 75 MVA (N-1 firm 75 MVA); dashed transformers = future phase.
- 138 kV main-tie-main + 13.8 kV N.O. tie; no parallel of feeds without Oncor approval.
- %Z, tap range, kA, CT/PT & relays — by final design.

### LEGEND

- Disconnect switch
- Circuit breaker
- Power transformer (Δ-Y)
- Fuse
- Capacitor bank
- Generator
- Surge arrester
- Revenue meter
- Connection (junction)

REV 1 · Issued for Interconnection Study · RBP · 2026-06-08

### ELECTRICAL ONE-LINE DIAGRAM

**NTSM Sherman — Grayson Co., TX**

Sherman, TX

Oncor (pre-WO) · Sub 300694

Customer: NTNSM, LLC

**R&B Power Inc.**

**Dwg RB-SH-E-001 · Rev 1**

Scale: AS SHOWN · Sheet 1 of 1

*Study-stage · not for construction*

**TOTAL CONNECTED LOAD: 70 MW (~72 MVA @ 0.97 pf) · data center**

Service: dual 138 kV feed · 795 kcmil ACSR · 2 × 75 MVA (N-1 firm 75) · per-feed 302 A